




# LeapFrog LeapTV Controller Button Replacement

This guide will provide you with the necessary knowledge to replace the "A" and "B" buttons on the LeapFrog LeapTV controller.

Written By: Triston Fischer

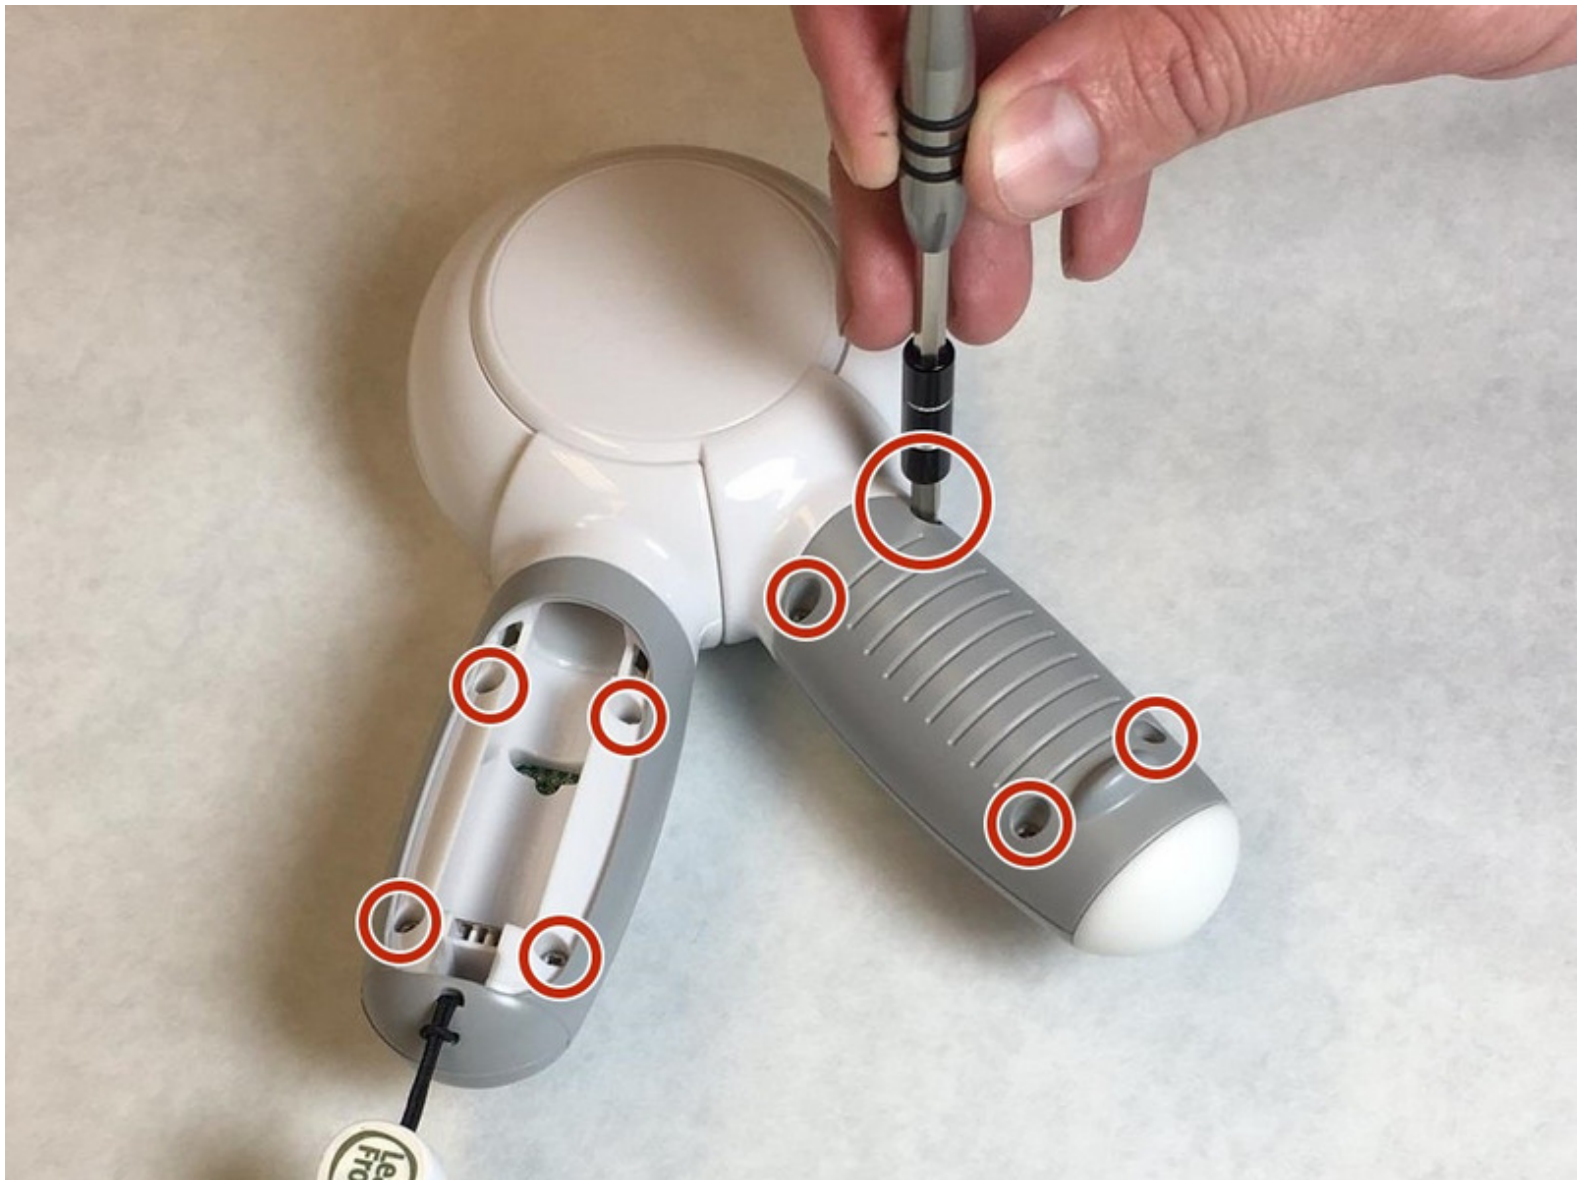

## INTRODUCTION

This guide will show you how to replace the "A" and "B" buttons on the controller.

---



### TOOLS:

- [Metal Spudger](#) (1)
  - [Philips Head Screwdriver: Size PH1](#) (1)
-

## Step 1 — Battery



- Use the Metal Spudger to push the release clip on the battery cover.

## Step 2



- Lift the cover off.

## Step 3



- The battery holder is now visible with the removal of the cover.

## Step 4 — Buttons



- Use the screwdriver to remove the eight 8.7mm PH1 Phillips head screws.



## Step 5




- Slightly lift up on the back cover until the handle covers are free to rotate.

## Step 6



- Slide the the side of the handle facing you to the left to reveal the "A" and "B" button circuit board.

## Step 7

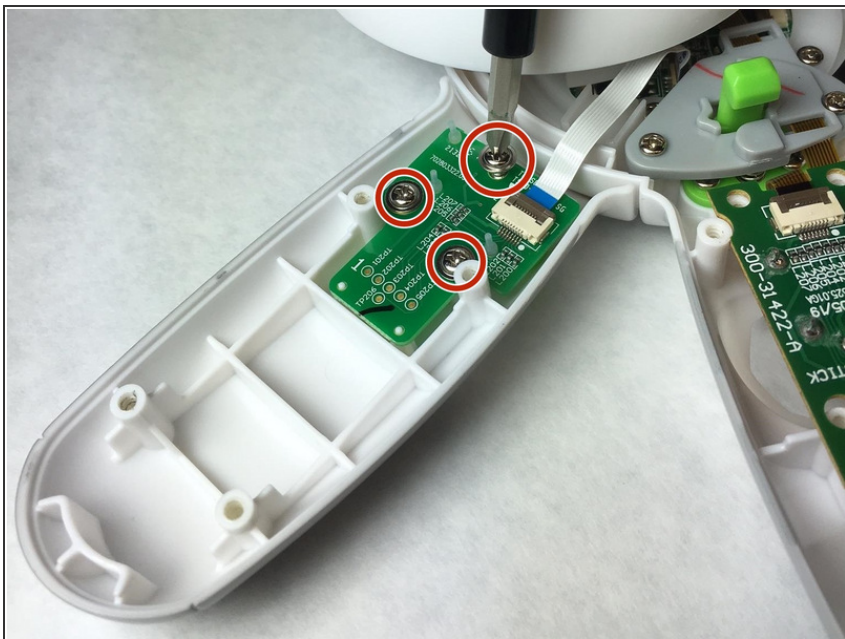

- Use the screwdriver to remove the three 8.5mm PH1 Phillips head screws.

## Step 8



- Lift up on the circuit board and move it to the side.
- ⓘ Be careful to not cause excess stress to the connecting wires when handling the circuit board. Excess stress can cause solder points to break.

## Step 9



- Use the plastic opening tool to release the buttons from the controller casing.

## Step 10



- Remove the "A" and "B" buttons by pulling up on one of the buttons.



## Step 11



- Buttons are now removed.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-13 08:24:14 AM.